



OCTA LIGHT®
OCTA LIGHT BULGARIA JSC
www.octa-light.com
info@octa-light.com






LM80 60 Months Warranty

IP 20 IP 66 IK 02

0-10 V OPTIONAL DALI OPTIONAL

130 lm/W RECESSED STANDARD

SURFACE 3 Hours Emergency OPTIONAL OPTIONAL



GUARANTEE / WARRANTY
5 years extended guarantee

- HIGHLIGHTS & BENEFITS**
- Energy-efficient LED linear luminaire
 - Delivered system efficiency of 130 lm/W
 - High-quality light output that is bright, consistent, and flicker-free
 - Optional dimming capabilities that can customize the lighting level to fit any occasion
 - Available in Cool, Neutral & Warm White Color Temperatures
 - Uniform light distribution, ensuring that the entire area is evenly lit without any dark spots
 - Classic and modern design that complements any interior style
 - Long lifespan up to 50,000 hours, reducing maintenance costs and downtime
 - Ideal for offices and meeting rooms
 - Suitable for shopping malls, supermarkets, hospital, school illumination, stores and corridor lighting

RLS Series

Recessed or Surface Mounted LED Linear Luminaires

FEATURES	
Operating voltage	198 - 264 V AC 50/60 Hz
IP rating	IP20, IP66 (Optional)
IK rating	IK02
LED package used	OCTALED
Dimmable	Yes DALI or 0-10V (Optional)
LED lifetime	50 000 h L90B10
Color rendering index	Ra>80
SDCM (MacAdam)	<3
Flicker	<5%
Power factor	>0.95
Emergency version	Yes 3 hours or CBS (optional)
Options and accessories	3HR,CBS,HCL,SFC


ADDITIONAL INFORMATION	
Type of installation	Recessed or surface
Housing material	Powder coated aluminum
Optical system	UV stabilized PC diffuser
Housing color	White
Operating temperature	-20°C to +45°C
Relative humidity	<60%
Electric class	I

PRODUCT SELECTION

Product order code (OC)	Power	Lumen output			Efficiency *for 840	Input current	Dimensions AxBxC, mm
		lm CW	lm NW	lm WW			
RLSADV06000068 CC	6W	780	780	702	130 lm/W	28 mA	600x57x85
RLSADV06000108 CC	10W	1 300	1 300	1 170	130 lm/W	46 mA	600x57x85
RLSADV12000128 CC	12W	1 560	1 560	1 404	130 lm/W	55 mA	1200x57x85
RLSADV12000148 CC	14W	1 820	1 820	1 638	130 lm/W	65 mA	1200x57x85
RLSADV15000188 CC	18W	2 340	2 340	2 106	130 lm/W	83 mA	1500x57x85
RLSADV15000368 CC	36W	4 680	4 680	4 212	130 lm/W	165 mA	1500x57x85
RLSADV15000458 CC	45W	5 850	5 850	5 265	130 lm/W	206 mA	1500x57x85


COLOR TEMPERATURE SELECTION

Correlated color temperatures CC		
2700 K	27	Warm White WW
3000 K	30	Warm White WW
3500 K	35	Warm White WW
4000 K	40	Neutral White NW
4500 K	45	Neutral White NW
5700 K	57	Cool White CW
6500 K	65	Cool White CW

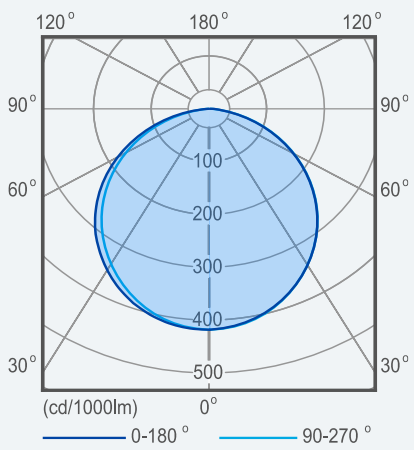

Options and accessories

Suffix to OC	Description
3HR	3 hours battery pack
CBS	Addr.mod.for central battery system
HCL	Human centric lighting
SFC	Surface mounting frame

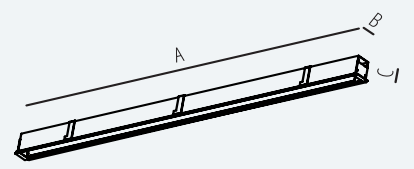

LED DRIVERS

Standard LED Driver	Premium constant current LED driver
DALI driver	DAL suffix to order code
1-10V dim. LED Driver	DIM suffix to order code

WIRING INFORMATION

Cable/Flying Lead	None
Type of wiring required	Parallel to mains supply voltage

Octa Light Bulgaria is a completely vertically integrated manufacturer of LED packages, LED modules, LED lamps and LED luminaires. The company was established in 2010 as the first Light Emitting Diodes (LED) manufacturer with production based entirely in the EU. Company's LED portfolio includes powerful high-brightness light emitting diodes, last generation of low-power & mid-power LEDs, wide range of COBs, and innovative AC LED modules, as well as special application LEDs. We are constantly expanding our LEDs range to bring highest performance and quality of light sources. Our business scope includes OEM and ODM supply of LED packages, LED engines, luminaires and lamps.

Octa Light Bulgaria offers also complete lighting solutions accomplishing variety of lighting projects with own range of luminaires. Further to its core lighting business the company offers Contract Electronics Manufacturing /CEM/ for key industries.